

# Deluxe Display by ArcticFox™


## Optional Door Accessory

### Standard Features

- Easy to read, blue LED display
- 7 button user interface that provides access to connected Tru-Dmnd evaporator coils
- Battery backup with Rechargeable battery
- Audible & visual alarm annunciation (local only, unless connected to Tru-Dmnd and registered on ArcticFox WiFi Smart Portal)
- HI & LO alarm temp setpoints
- Readout in °F or °C with automatic scale conversion
- Adjustable alarm delays
- One or two compartments monitoring capable
- Saves energy and lowers cost

### Specifications

- Input Voltage: 120V or 208V-240V
- Operating Temp: -40°F to 140°F (-40°C to 60°C)
- Operating Humidity Range 0% to 95%, non-condensable
- Temperature/ Digital Inputs (3) multi-use (temp sensor or digital input) (1) designated as digital input for door switch
- Input (1) designated for Panic button
- Relays Outputs: Door Heater Relay - Max 3A @ 120 VAC Lights Relay - Max 5A @ 120/240 VAC Alarm Relay - Max 5A @ 120/240 VAC (Dry Contacts)
- Communication: (1) RJ-11 connection for RS-485 serial communication to the Tru-Dmnd evaporator coil
- Buzzer 95dB
- Battery Backup 9 VDC, rechargeable battery

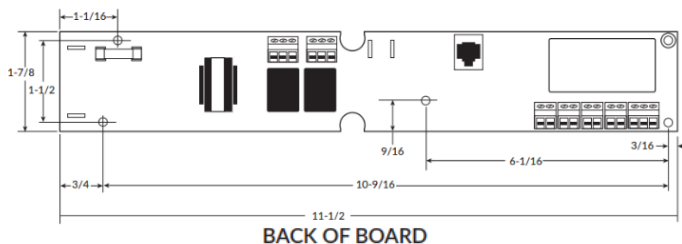

Display by ArcticFox